


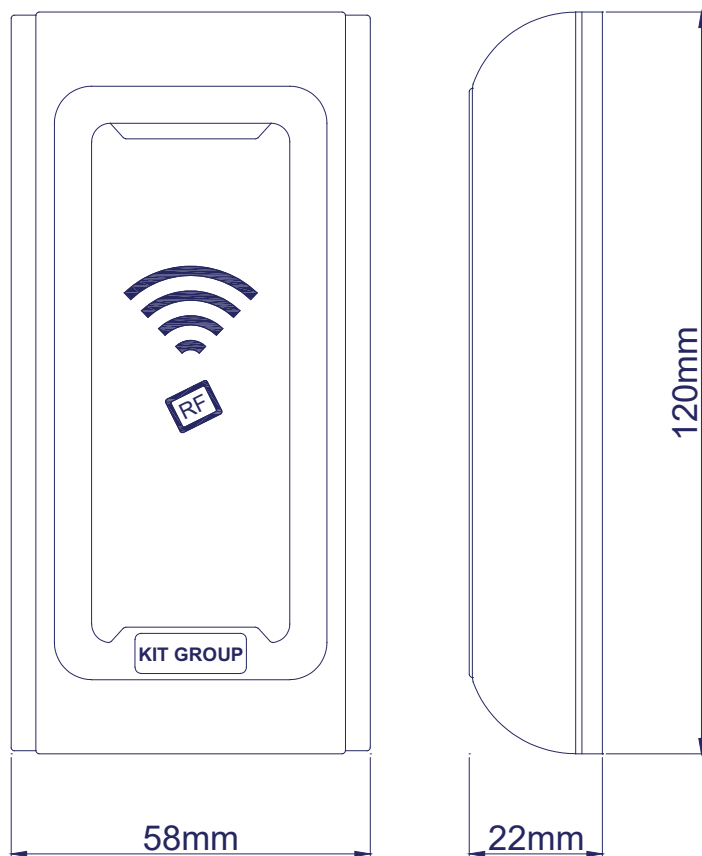

🇮🇹 LETTORE WIEGAND 26 DI CHIAVI ELETTRONICHE CONTACTLESS RFID 125 KHZ

K-RF6-EM è un lettore da parete a due fori di fissaggio Ø 4 mm con interasse 90 mm.

In metallo e IP 68 resiste a usura, atti vandalici e agenti atmosferici. Il lettore integra un LED 12 V DC bicolore rosso e verde.

DATI TECNICI

Alimentazione: 12 V DC
Consumo: 30 mA
Frequenza RFID: 125 KHz
Distanza di lettura RFID: 30/60 mm
Protocollo: Wiegand 26
Distanza max da controller: 100 m
Lunghezza cavo: 200 mm
Materiale: metallo e ABS
Grado di protezione: IP 68
Temperatura operativa: da -45° a +60° C
Interasse fori: 90 mm
Dimensioni lettore: 120 x 58 x 22 mm
Peso: 500 g

CONTENUTO

1 pz K-RF6-EM
 1 pz ADESIVO DIMA DI FORATURA
 2 pz TASSELLO Ø 5 MM X 30 MM
 1 pz CHIAVE TORX T10
 1 pz MANUALE DI INSTALLAZIONE

🇬🇧 WIEGAND 26 READER FOR CONTACTLESS 125 KHZ RFID ELECTRONIC KEYS

K-RF6-EM is a wall reader with two fixing holes Ø 4 mm and interaxle spacing of 90 mm.

Made of metal and IP 68, resistant to wear, vandalism and atmospheric agents.

The reader integrates a two color green and red 5 V DC LED.

TECHNICAL DATA

Supply voltage: 12 V DC
Stand-by energy consumption: 30 mA
RFID frequency: 125 KHz
RFID reading distance: 30/60 mm
Protocol: Wiegand 26
Maximum distance from controller: 100 m
Cable length: 200 mm
Material: metal and ABS
Protection rating: IP 68
Operating temperature: from -45° to +60° C
Interaxle spacing: 90 mm
Reader dimensions: 120 x 58 x 22 mm
Weight: 500 g

PACKING LIST

1 pc K-RF6-EM
 1 pc ADHESIVE DRILLING JIG
 2 pcs Ø 5 MM X 30 MM RAWPLUGS
 1 pc T10 TORX WRENCH
 1 pc USER MANUAL